



SEALED IN QUALITY

Intumescent Seals

Intumescent fire and smoke seals for door assemblies



Specification

An intumescent graphite based fireseal contained within a PVC sleeve for fitting into a rebate to either the leaves or the frame of a door.

In the event of a fire the seal expands to many times its original volume and seals the gap around the door. It provides a safe and effective barrier against the passage of fire smoke and hot gases.

Exitex intumescent fireseals are available with or without a cold smoke seal in the form of a grey nylon pile or a black neoprene rubber draught seal.

Exitex smoke seals provide a permanent barrier to smoke, particularly important as smoke fumes travel faster and further than the fire itself.

They also have acoustic and thermal applications

All Exitex fire and smoke seals are supplied with a self adhesive backing as standard to facilitate quick and easy fitting.

Certifire Approved

Tested for 30 minutes with 10mm and 15mm to BS 476 part 22 and 31.1.

Tested for 60 minutes with 20mm, 25mm and 30mm to BS 476 part 22 and 31.1.

Smoke seals tested to EN1634-3.

Tested to 100,000 open / closed cycles.


To seal the bottom of the door please refer to our range of weatherbars in our Draught and Weather Seals Catalogue



No.1
choice for
professionals


pro[®] Professional
Components

Fire Only

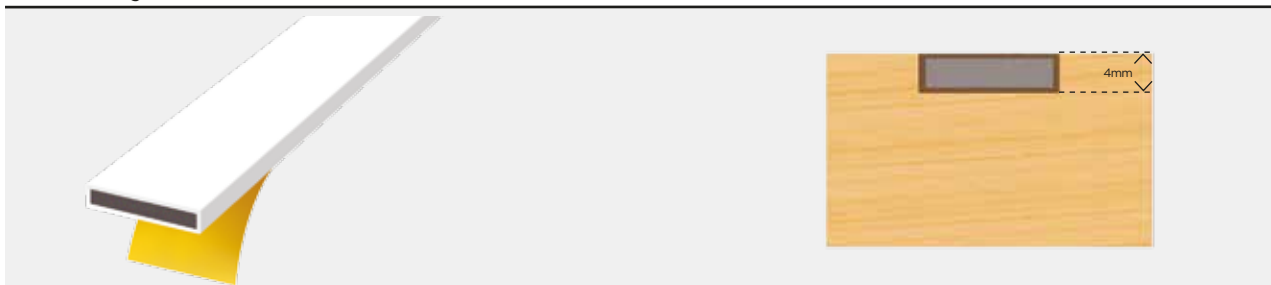


Product Ref	Profile Size	Type	Fire Rating	Lengths	Colours
Ref: 1.31.0001	10mm x 4mm	Fire Only	30mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0002	15mm x 4mm	Fire Only	30mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0003	20mm x 4mm	Fire Only	60mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0004	25mm x 4mm	Fire Only	60mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0005	30mm x 4mm	Fire Only	60mins	1.05m/2.1m	Wh/Bn

Fire & Smoke Seal

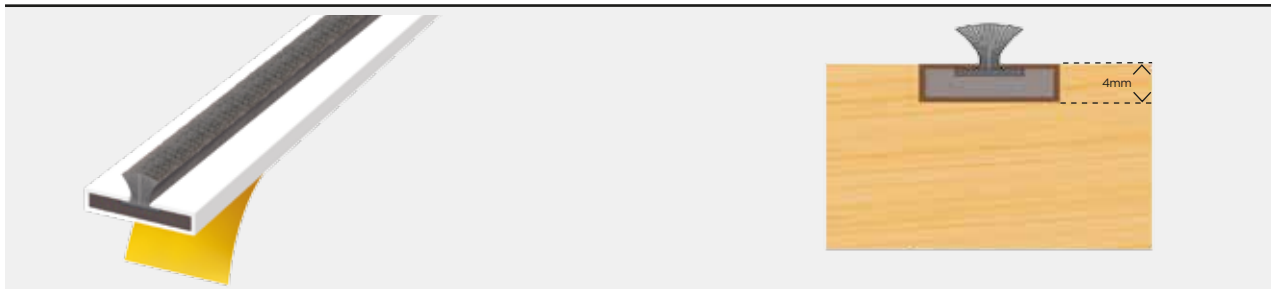


Product Ref	Profile Size	Type	Fire Rating	Lengths	Colours
Ref: 1.31.0101	10mm x 4mm	Fire & Smoke	30mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0102	15mm x 4mm	Fire & Smoke	30mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0103	20mm x 4mm	Fire & Smoke	60mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0104	25mm x 4mm	Fire & Smoke	60mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0105	30mm x 4mm	Fire & Smoke	60mins	1.05m/2.1m	Wh/Bn

Fire & Smoke with Single Flipper

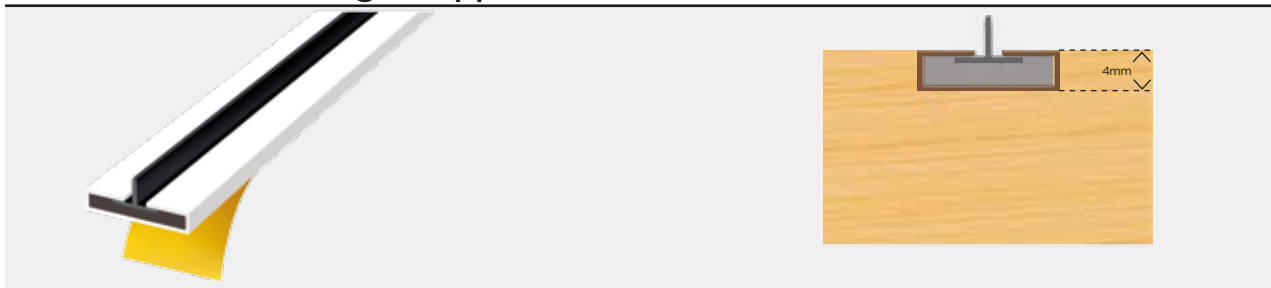

Product Ref	Profile Size	Type	Fire Rating	Lengths	Colours
Ref: 1.31.0021	10mm x 4mm	Fire & Smoke	30mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0022	15mm x 4mm	Fire & Smoke	30mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0023	20mm x 4mm	Fire & Smoke	60mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0024	25mm x 4mm	Fire & Smoke	60mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0025	30mm x 4mm	Fire & Smoke	60mins	1.05m/2.1m	Wh/Bn

Fire & Smoke with Double Flipper

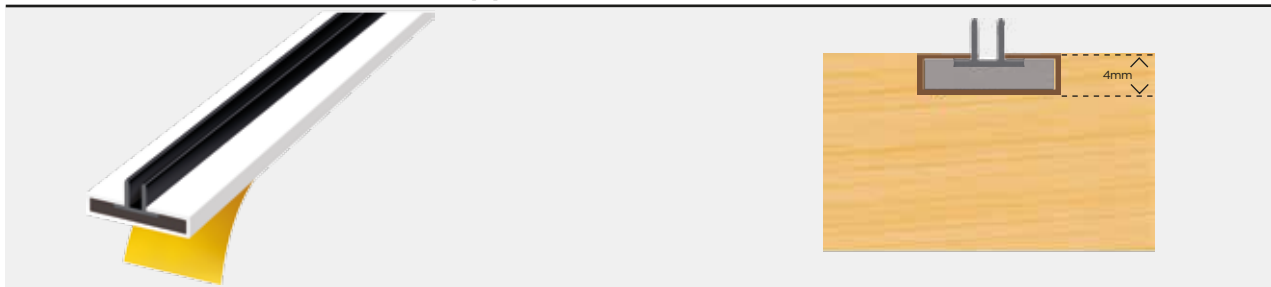

Product Ref	Profile Size	Type	Fire Rating	Lengths	Colours
Ref: 1.31.0011	10mm x 4mm	Fire & Smoke	30mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0012	15mm x 4mm	Fire & Smoke	30mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0013	20mm x 4mm	Fire & Smoke	60mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0014	25mm x 4mm	Fire & Smoke	60mins	1.05m/2.1m	Wh/Bn
Ref: 1.31.0015	30mm x 4mm	Fire & Smoke	60mins	1.05m/2.1m	Wh/Bn